

AC 110V / 220V 電源避雷器

ITEM NO: **SP001P-AC110 / 220**


產品功能特性：

- 保護設備免於遭受瞬間突波或雷擊傷害.
- 適用電壓: SP001P-AC110 (AC100V~120V)
- SP001P-AC220 (AC220V~240V)
- 2 蕊端子電源輸入轉 2 蕊端子電源輸出
- 最大負載電流: 10A




Installation View:

SP001P-AC110

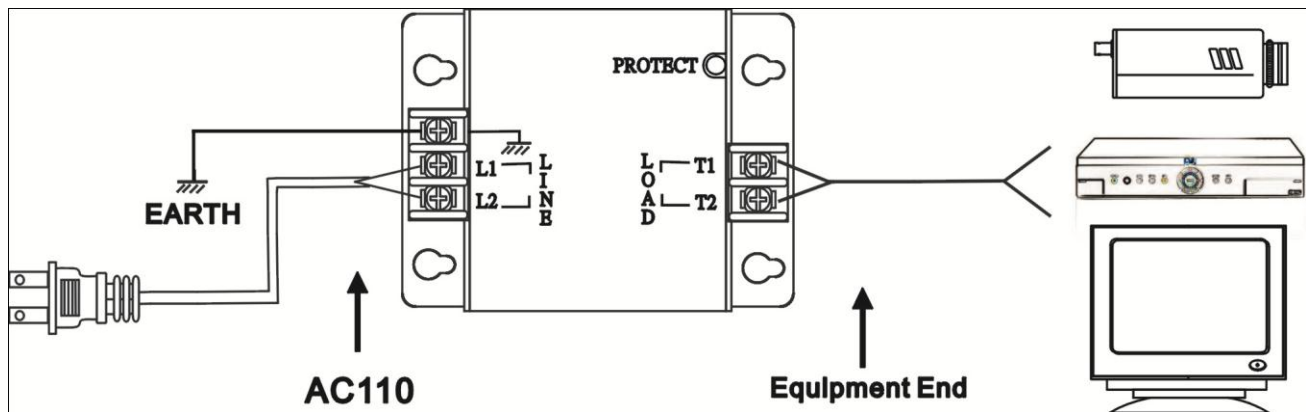

SP001P-AC220

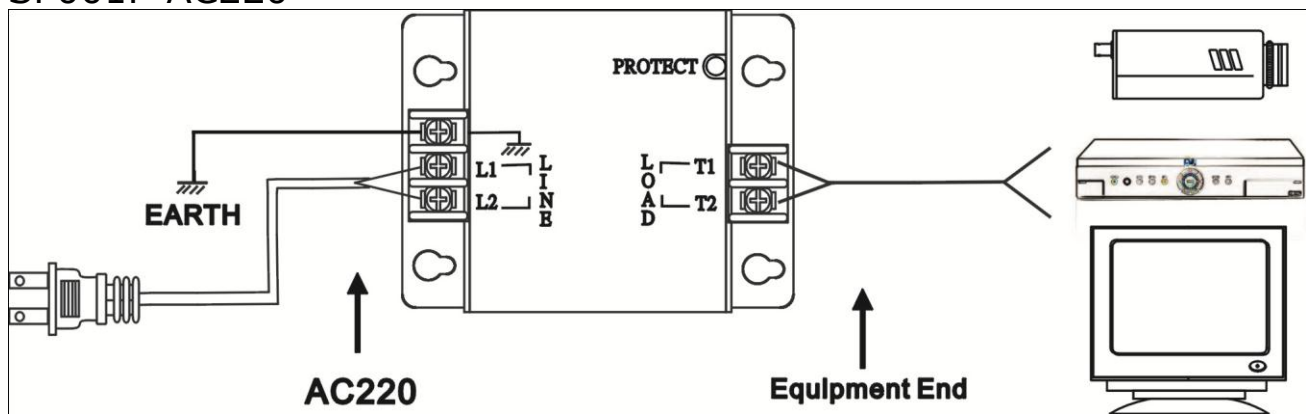

Specification:

DIAMOND

ITEM NO.		SP001P-AC110	SP001P-AC220
Nominal peak voltage(正常峰值電壓)	Wire	>150V	>300V
	Wire~grounding	>150V	>300V
Surge Current Capacity(放電電流)		6000A (8x20uS)	
Surge Voltage Capacity(放電電壓)		6,000V (1.2uS x 50 uS)	
Response time (反應時間)		<0.1uS	
Leakage current(漏電流)	Wire	<1mA (at150VAC)	<1mA (at300VAC)
	Wire~grounding	<1mA (at150VAC)	<1mA (at300VAC)
Max. Load Current(最大負載)		10Amp (Max)	
Temperature (溫度)		Operation: 0 to 55 C, Storage: -20 TO 85 c, Humidity: up to 95%	
Connectors (連接頭)		Terminal	
Material (材質)		Metal Black	
Dimensions(尺寸) W x H x D mm		87 x 67 x 27 mm	
WEIGHT (重量) g		130 g	